

APPLICATION NOTE


ONLine Access

Set up parameters
at the EWSI Controllers



A063

1. BLUETOOTH READER SETTING

- Run XPR Smart Admin. At the **"My Devices"** tab click on the reader which needs to be connected to EWSI.

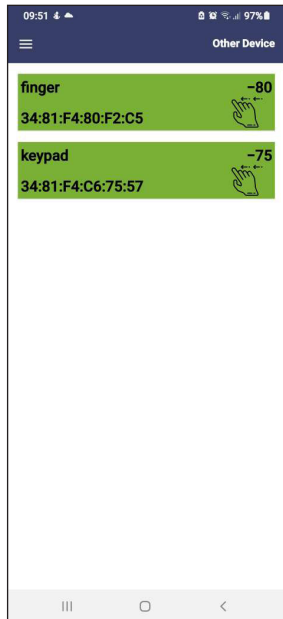

- Click on **"Device"** Tab and then select **"Set Device Configuration"**.

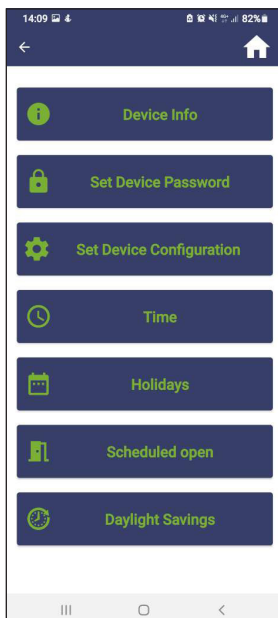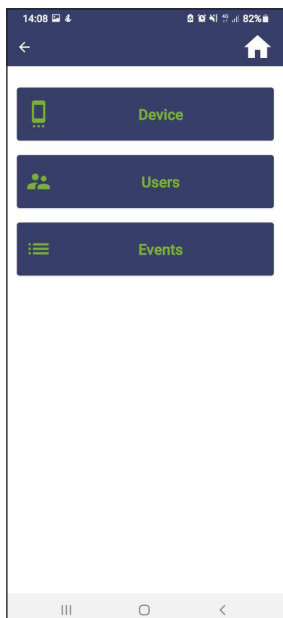

Set Wiegand type **“34 bits”** and Keypad Wiegand **“burst 8 bit”**. Then click on **“Save”** Tab.

13:43

83%

Configuration

Backlight

Buzzer

r1 Door 1 open time

3

r2 Door 2 open time

3

Card Type

EM4100

Wiegand Type

34 BIT

Keypad Wiegand

BURST 8 BIT

SAVE

Each card and key press will be sent to EWSI controller over Wiegand lines. If fingerprint or mobile access is needed, then in the reader appropriate user must have defined card number.

Card Access

Card Number

1567438

GET CARD INFO

Door1

Door2

Access

Access

Keypad Access

PIN

123456

Door1

Door2


Access

Access

SAVE USER

TEST WIEGAND

2. CONNECTION WITH WS4 EWSI

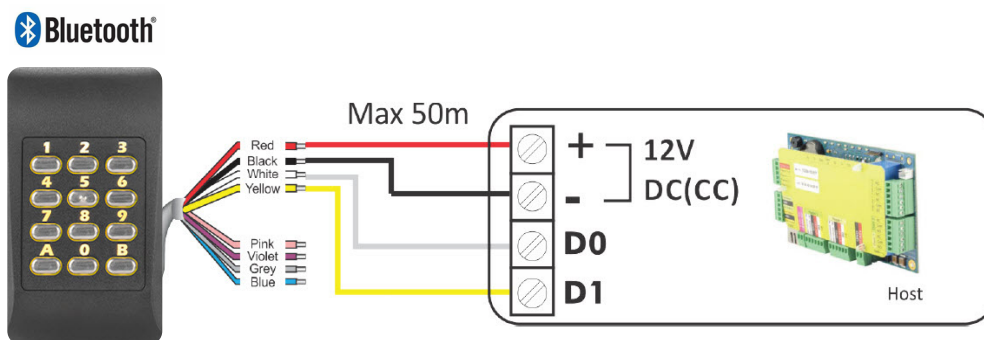

At PROS CS select Reader/Properties/select **“Wiegand”** and the type of the reader.

